

Raymond

design: Gianantonio Perin Giorgio Topan

Technical product sheet



Flexible system that extends from the prestigious executive desks to the operational ones. The loop legs guarantees an elegant appearance with a minimalism of forms.





* w. 200 cm also with d. 100 cm

H: 74 cm



w140÷200* cm **w**80÷200* cm **d**60 - 80 cm




w 160÷200* cmd 80 cm



w 160÷-200* cmd 80 cm



w 80÷*200 cmd 60-80 cm



w 80 - 120 cmd 60 cm



w 120÷200 cmd 60 - 80 cm



w 120÷200 cmd 80 cm




w 120÷200 cmd 124 - 164 cm



w 120÷200 cmd 124 - 164 cm




w 120÷200 cmd 124 - 164 cm



w124 cm **w**164 cm **d**80 cm **d**80 cm



w 280-320 cmd 124 - 164 cm



w 240-320 cmd 124 - 164 cm



w 360-520 cmd 124 - 164 cm



w 100÷240 cmd 124 - 164 cm



ø 100 - 118 cm



ø 100 - 118 cm



ø 60 - 80 cm

H: 39,5 cm






w 60 - 120 cm

60 cm

1. Raymond • TECHNICAL FEATURES



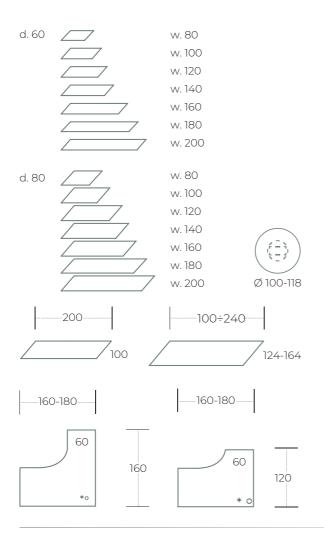

• Melamine top:

made of 18 mm thick chipboard covered with decorative paper impregnated with melamine resins, edged on the perimeter with 2 mm thick solid abs.

Rounded, 2 mm radius. Density 620 Kg / m 3 Formaldehyde emission class Carb phase II Fire reaction class: 2.

* Cap applied

Veneer top:

made of chipboard 18 mm thick covered on both sides with veneer thickness 0.6 mm. and bordered on the perimeter with solid wood thickness. 2 mm. rounded. Painting, after painting, by means of anti-reflective polyester paints, (<40 gloss) oven dried with UV system.


Density 620 Kg / m 3

Formaldehyde emission class Carb phase II

Fire reaction class: 2.

· Glass top:

in tempered glass with a thickness of 12 mm, with a bevelled polished edge and a underlying surface sandblasted or lacquered in various colors. The glass tops are fixed to the structure by means of suction cups.

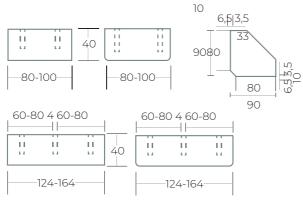

• Extensions:

tops for extensions and fittings including adjustable metal brackets to guarantee coplanarity.

Telescopiche



Fisse




· Beams:

the legs are connected by a pair of telescopic or fixed beams made with 40 x 40 mm square section drawn tubes. At the ends of the beams are inserted the hooking elements to the portal legs in transparent abs; the extension of the telescopic beams varies from 800 to 1000 mm. from 1000 to 1200 mm. from 1200 to 1800 mm. from 1800 to 2400 mm. The extension of the fixed beams is 1400 mm. - 1600 mm. - 1800 mm. - 2000 mm.

1. Raymond • TECHNICAL FEATURES



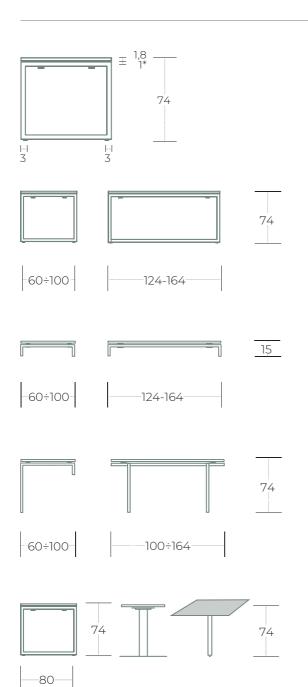







· Legs:


made of drawn steel tube having a section of 70×30 mm and 1.5 mm thick. At the lower ends are inserted At the lower ends are inserted the shoes in chromed abs with housed the leveler of about 1 cm in height.

- *1 cm of usable space for fixing hanging typing brackets / linear aggregations and multiple accessories. (CPU holder, cable duct baskets and beam-to-floor fixing)
- **A.** The legs are fitted with a foot with +/- 10 mm leveler
- **B.** The leg has 4 holes for fixing a pair of beams.
- **C.** The legs H.74 have the possibility of applying KIT for height adjustment optional, H. 62 86.

A tubular steel is inserted on the cutting leg H. 62. This one has multiple 2 cm pitch holes. The leg is then pierced for the insertion of a metric screw that blocks the desired height.


2. Raymond • CONSTRUCTION FEATURES










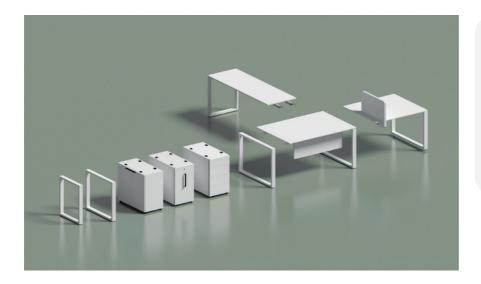


• Desks Index :

d. 60/80/100 desks take a double beam.





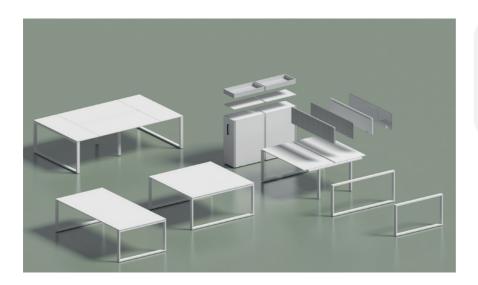


• Bench abacus:

bench and meeting tables

3. Raymond • COMPONIBILITY




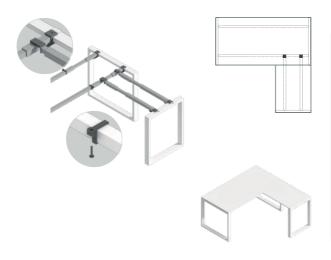

• Desk with hanging return:


is an add-on module 60/80 cm deep fixed to the main desk by means of molded joints in glassfilled ABS and steel plates. N 2 clips are also supplied which, hooked to the

beams, guarantee the coplanarity of the tops

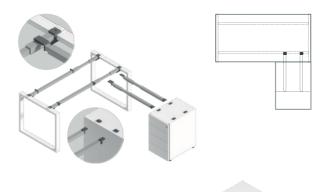

· Hanging return on desk high supporting pedestal:

is an add-on module 60 cm deep with loadbearing chest of drawers (3 or 4 drawers) that comes fixed to the main desk by means of molded joints in loaded ABS glass and steel plates, the beams then rest on the load-bearing drawer unit and fixed to the top by means of metric screws, all guaranteeing the solidity of the structure. N 2 clips are also supplied which, hooked to the beams, guarantee the coplanarity of the tops

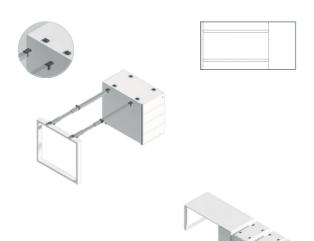

• Desk with supporting storage:

an 80 cm deep desk with a supporting container under the top. They can be mounted both on the right and on the left The containers can be:

- · Pedestal with 3 or 4 drawers with lock
- \cdot Vertical file right left with lock
- · Cabinet with 2 doors and lock

The beams rest on the supporting furniture and fixed to the top by means of metric screws, all of which guarantees solidity of the structure. N 2 clips are also supplied which, when hooked to the beams, guarantee further solidity of the

3. Raymond • COMPONIBILITY







Desk with linear aggregation:

system gives the possibility to add an additional top to the main desk linearly without doubling the leg centrally.

Linear aggregation occurs thanks to the use of telescopic beams

which guarantee the sharing of the central leg. The beams and the leg are fixed to the top with metric screws.

N 2 clips are also supplied which, when hooked to the beams, guarantee further solidity of the top








• Bridge desk on service cabinet:

desk that lays on a service unit. They can be mounted both on the right and on the left. Containers with different dimensions with no pre-holes on the top. The user can choose position of the desk to his liking.

End leg can be

- · total bridged
- · one reduced leg

During the installation, the legs can be placed simply or fixed after drilling the furniture on site using a metric screw.

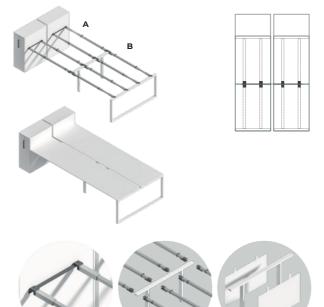


B.1

Bench with intermediate leg and high aggregate container (Open Space Container):

workstations for 2 or more people, with a depth of 164. The worktops have a depth of 80. Thus a space of 4 cm is formed between the tops that can be used as cable outlet or screen fixing. The retracted central leg works thanks to the use of telescopic beams which guarantee the sharing of the leg between the floors. The beams and the leg are fixed to the floors by means of metric screws. Then there is the possibility of aggregating a tall container Open Space Container, only on the depth 80 164 by means of a steel bar fixed to the container that supports the beams. This part must be fixed on the side of the container by means of 2 metric screws. The container has 2 through holes on each side with threaded inserts, thus allowing correct positioning.



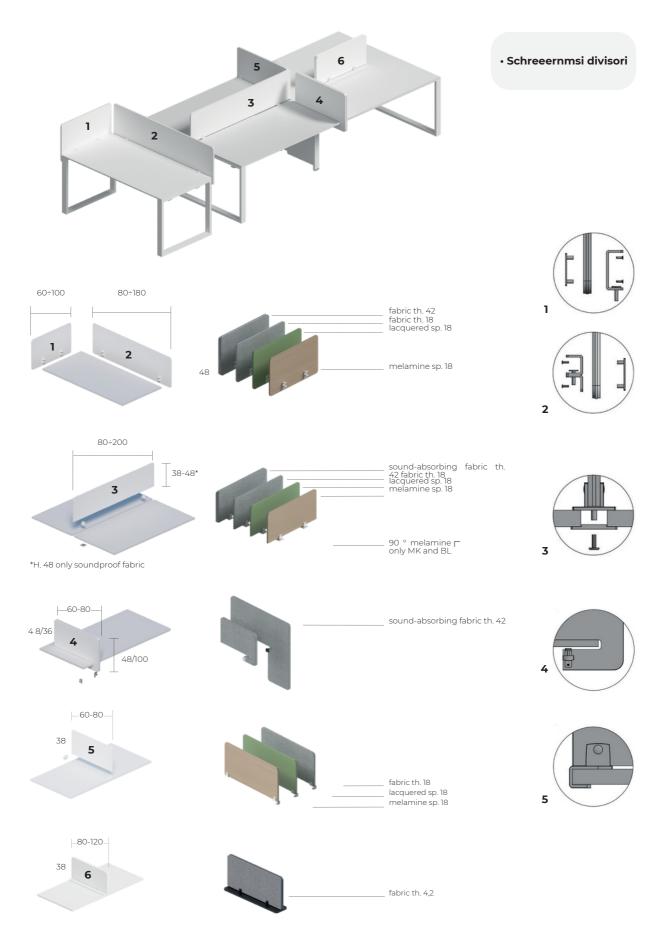





Storage box



Metal panel for magnet and smartphone/tablet holder



Metal push pins cork panel and smartphone/ tablet holder




A4 sheet tray




Additional A4 sheet tray GZ .0350.V 1
















Modesty panels:

made of 18 mm thick melamine (density 620 kg / mc class and 1 with low formaldehyde emission according to CARB standards, fire reaction class 2). The modesty panels have side brackets that hook onto the beam with a clamp.

• CPU Holder:

CPU holder in metal hanging from the leg of the desks, which can be positioned according to the customer's choice.

The fixing takes place through a metric screw that blocks the upper clamp of the CPU holder. Pc case Max. size: L.20 D.46 H.50 cm

· Hanging drawer:

metal drawer with lock and soft-closing guides. Possibility of inserting stationery tray. It is supported by the beams with fins and fixed with 4 screws to the floor.







rotation +/- 180 $^{\circ}$

sliding +/- 45 $^{\circ}$

inclination +/- 90 °













Easy clamp mounting (desk thickness 10 to 85 mm) or through hole and jaw (desk thickness from 10 to 80 mm).

VESA 75 x 75 - 100 x 100 compatibility

Max monitor weight: 8 Kg

Max monitor format: 32"

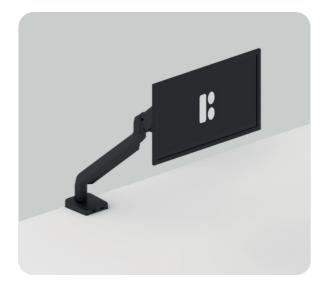

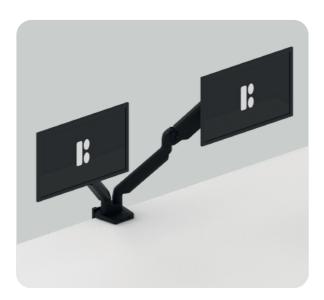

• Dual monitor arm:

fully adjustable monitor arms with innovative gas spring technology for effortless movement and adjustments of the monitor. The cable sorting system keeps the desk tidy and the 2 USB ports at the base allow you to connect the devices. Adjustable in height up to 41.5 cm and in depth up to 44.5 cm.

Easy clamp mounting (desk thickness 10 to 85 mm) or through hole and jaw (desk thickness from 10 to 80 mm).

VESA $75 \times 75 - 100 \times 100$ compatibility.

Max monitor weight: 16 Kg

Max monitor format: 32"








Square grommet plug



Round cable grommet



Versapad ._ _
n.1 USB "A", n.1 USB "C"
n.1 electric socket



Wireless charger



Plastic top access



Top access aluminum



Socket block for. _ _ n.1 USB "A", n.1 USB "C" n.3 electrical sockets



Double-sided top access





USB charger n.2 USB



Socket door block.__ n.1 USB "A", n.1 USB "C" n.2 electrical sockets



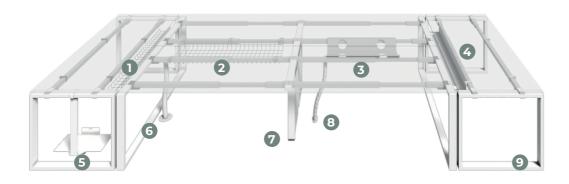



Cable tray in chrome



Chrome cable tray for bench



Cable tray metal sheet



Cable tray metal sheet



Cpu holder



Fabric cable vertebra



Intermediate leg cover



Cable vertebra



Vertical magnetic cable tray for leg attachment


6. Raymond • FINISHES



STRUCTURE



Metal

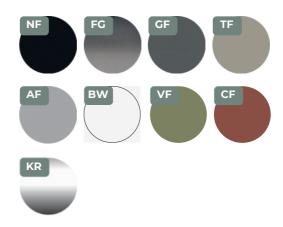




TOPS, MODESTY PANEL, SCREENS *



ullet Veneer (only tops and modesty panels)

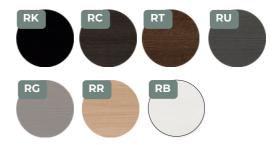

Melamine




ABS edge (only tops)




6. Raymond • FINISHES



• Glass (only tops)

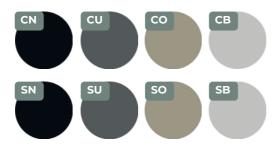

 Lacquered matt (only screens and modesty panels)

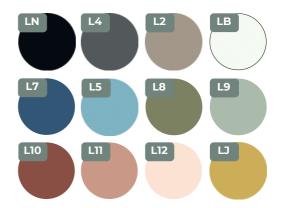

Fabric (screens only)


MIRAGE




NEMI MELANGE



FENICE 🙈

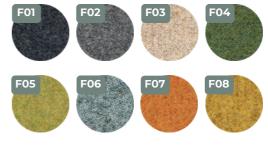

CONVERT MEL 4000

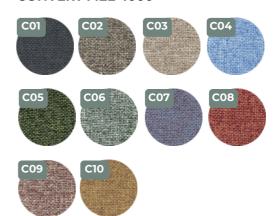

7. Raymond • CERTIFICATIONS

















The mark of

 Our melamine products can be supplied FSC®. Contact the office commercial for feasibility and costs additional.

 Our company operates with the primary objective of ensuring products that achieve a correct balance between environmental sustainability and design.



· CAM available on selected items. Contact the sales office for know the products and additional costs

Available on selected items. Contact the sales office to find out about the products and additional costs.

They are introduced with attachment no. 2 to the Ministerial Decree of 11 January 2017 and are an integral part of the action plan for the environmental sustainability of public administration consumption (green public procurement). The public contracting stations are required, under penalty of nullity, to introduce in the tender documents "for the supply and rental of interior furnishings" the technical specifications and contractual clauses defined in the document "minimum environmental criteria".

EN-UNI

Test description

GENERAL SAFETY REQUIREMENTS

Test result

EN	-527-2:2016+A1:2019	oar. 4	1-
4.2	EN 527-2:2016+A1:2019	9 par. 6	5
ΕN	527-1:2011		
EN	1730:2012 par. 6.2		
ΕN	1730:2012 par. 6.3		
ΕN	1730:2012 par. 6.4.2		
ΕN	1730:2012 par. 6.4.3		
EN	1730:2012 par. 6.5		
EN	1730:2012 par. 6.6		
ΕN	1730:2012 par. 6.7		
ΕN	1730:2012 par. 6.9		
EN	1730:2012 par. 7.2		

INFORMATION FOR USE
DIMENSIONS OF TABLES AND DESKS
STATIC HORIZONTAL LOAD
VERTICAL STATIC LOAD
RESISTANCE TO HORIZONTAL FATIGUE
STRUCTURE RIGIDITY
RESISTANCE TO VERTICAL FATIGUE
IMPACT ON THE FLOOR
BENDING OF THE PLANS
FALL
STABILITY WITH VERTICAL LOAD
CERTIFICATE Legislative Decree 81/08

Respected	OK	
Respected	OK	
Respected	OK	
No flaws	OK	
Respected	OK	
No flaws	OK	
Respected	OK	
Respected	OK	


8. Raymond • RECYCLABILITY







Our concept of well-being goes beyond the office space. It takes into account both the health of the person outside of work and the health of our planet. For this reason, the objects are developed to promote the most positive postures and movements for our body. The materials are selected to have a positive effect on the healthiness of the work environment and to produce the lowest possible environmental impact.

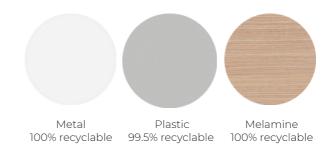



- selection of raw materials
- attention and care in the choice of materials: veneered wood, glass, leather, fabric, ceramic glass



 \cdot certified production, ecological and respectful of the environment and the user



space planning



· industrial production capacity



· warranty and availability of components



experience



special items

9. Raymond • CLEANING AND MAINTENANCE



Melamine

Melamine products have high surface resistance and normal household hygiene products can be used to clean them with some precautions.

- · Avoid the use of abrasive detergents, containing chlorine and derivatives, acid or strongly basic products and degreasing products.
- · Avoid using spray products directly on the surface that could leave marks
- \cdot Use a neutral liquid detergent with a soft damp cloth, then rinse carefully with the use of a cloth Avoid direct use of water
- It is preferable not to apply the products directly to the surface but to apply them using a soft cloth. This prevents other surfaces that could be damaged from coming into contact
- Pencil marks can be removed with the simple use of a common eraser.

- · To clean the steel surfaces, we recommend using hot water and soap neutral, then rinse carefully using a soft cloth and dry carefully. Products in trade for the cleaning of stainless steel having the foresight to clean always in the sense of the satin finish (if here I'm).
- · Avoid using abrasive products and detergents, powder detergents, products containing chlorine and derivatives, bleach, hydrochloric acid or solvents such as acetone, toluene, Xylene etc. · Any limescale deposits can be removed with vinegar or products anti-limescale
- · Immediately remove any stains from products such as grapefruit and cola.
- It is preferable not to apply the products directly to the surface but to apply them using a soft cloth. This prevents other surfaces that could be damaged from coming into contact.

Wood veneer

Wood is a living material and consequently requires special attention and one correct maintenance to best preserve its characteristics. It is advisable to follow simple precautions:

- 1) Keep the furniture in a dry and well ventilated place. 2) Avoid excessive humidity and too dry heating which can cause bulges and cracks.
- 3) Avoid the use of abrasive cleaning products.
 4) Protect the surfaces of the tables with clothespins before placing hot dishes on them. For cleaning, use a soft cloth moistened with alcohol diluted with a lot water (90%). Dry immediately with a soft, dry, non-abrasive cloth. NEVER use: products containing acetone, trichlorethylene, chlorine, ammonia, thinners, abrasive cleaners, wax or furniture polish. Clean immediately from products such as wine and acids. It is advisable to clean in the direction of the grain.

Exposure to direct sunlight it could alter the color of the wood.

Aluminum

The aluminum surfaces can be cleaned using common products available on the market for cleaning shiny surfaces or glass surfaces, taking care of dry them with a soft cloth

- The aluminum surface must always be cleaned following the direction of the satin finish, if present.
- Never use powder detergents, abrasive or steel sponges that would irretrievably scratch the surfaces
- Avoid using detergents that contain chlorine or its derivatives such as bleach and hydrochloric acid.
- \cdot It is preferable not to apply the products directly to the surface but to apply them using a soft cloth. This prevents other surfaces that could be damaged from coming into contact

Glass

The glass tops and doors are easy to clean: use a damp cloth and detergent non-abrasive than those specific for cleaning glass normally on the market. Be careful not to let stains of foods rich in sugars settle for a long time, such as jams or chocolate, to avoid crystallization. NEVER use: abrasive products and / or sponges, products containing acetone, ammonia, chlorine and solvents, detergents or anti-limescale liquids, cutlery or steel utensils to remove attached food residues, steel wool and powdery substances to avoid scratches. In combinations of glass with other materials such as wood or metal it is recommended not spray the product directly on the surface, but on a cloth. Most some glass cleaning products contain ammonia, a substance that can attack the surfaces of the frames, in wood or lacquered, etc

Lacquers

The lacquered surfaces are very delicate and require particular care in use daily and proper maintenance in order to preserve its characteristics in the time.

- · Avoid the use of abrasive cleaning products or aggressive, they could ruin irreparably the surfaces, in particular avoid products containing acetone, trichlorethylene, chlorine and derivatives, ammonia, thinners, abrasive detergents, wax or polishes for
- \cdot Avoid exposure to direct sunlight, it could alter the original color of the surfaces
- · Use a neutral liquid detergent with a soft damp cloth, then rinse carefully with a cloth and dry thoroughly

Fabrics

- \cdot For ordinary cleaning it is recommended to regularly brush the coating with a soft brush and / or to vacuum with the special accessories supplied with the avacuum cleaners, taking care to set the correct suction power
- · For any washing, when required, subsequent drying and ironing, contact Auraa Design.

design







