



www.auraadesign.co.uk

RYDER

Desk



Ryder


Ryder

**Ryder is a synthesis of tradition and modernity,
where the timeless class of the ring leg is enriched by special
design.**



Ryder SYNOPTIC GRID

h 75 cm

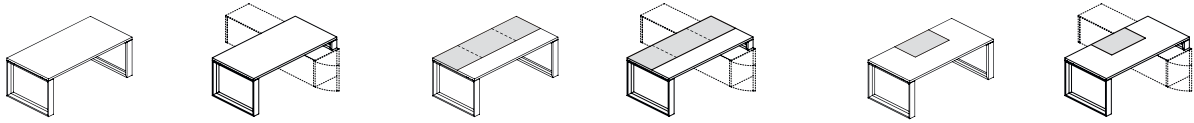

w 160-180 cm
d 80 cm


w 200÷240 cm
d 100 cm

w 180 cm
d 80 cm

w 200÷240 cm
d 100 cm


w 200÷240 cm
d 100 cm

h 38,5 cm

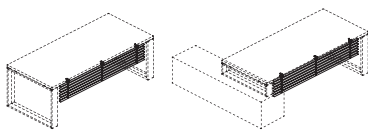


w 100÷200 cm
d 2,3 cm

h 30 cm

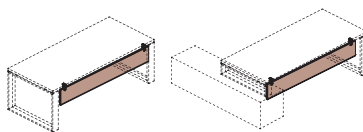


w 110÷210 cm
d 1,9 cm

h 50 cm

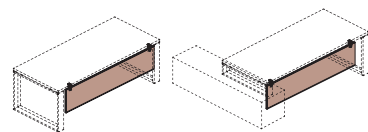


w 110÷210 cm
d 1,9 cm

h 75 cm




w 120 cm
d 60 cm

h 75÷132cm






w 122,5 cm
d 60 cm

h 54 cm




w 173,2 cm
d 56,2 cm

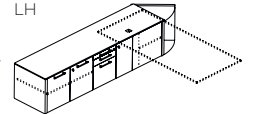


w 214,9 cm
d 56,2 cm

h 60,6 cm




w 133,3 cm
d 56,2 cm

h 74 cm



w 175,2 cm
d 56,2 cm

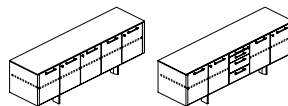

w 216,9 cm
d 56,2 cm

h 160 cm




w 45 cm
d 45 cm

h 40 cm




w 60 cm
d 60 cm




w 120 cm
d 60 cm

Ryder SYNOPTIC GRID

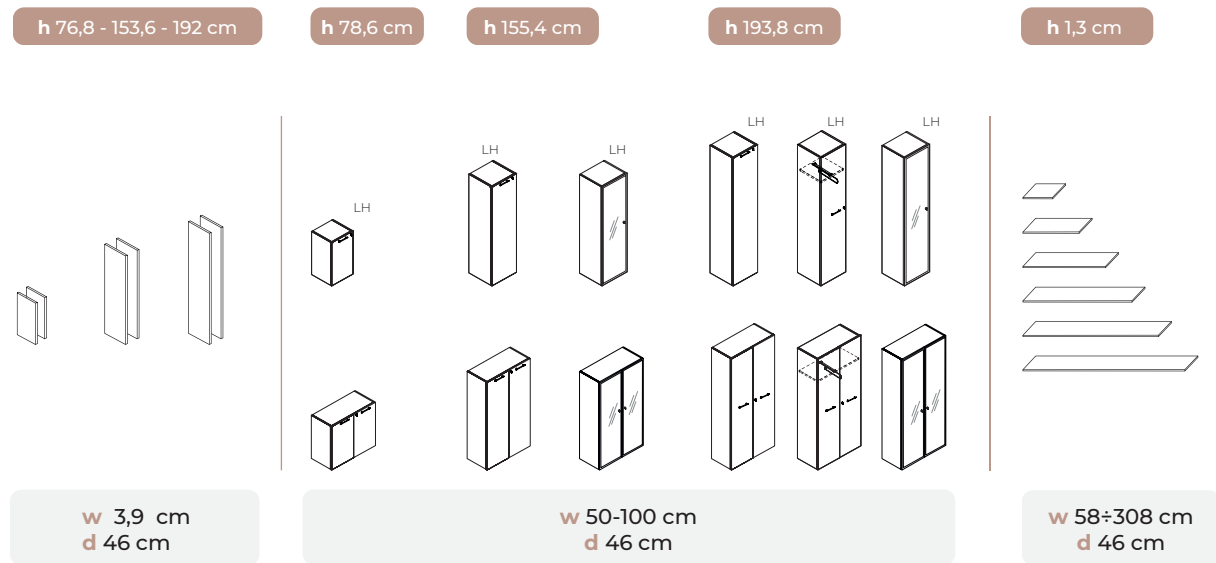

Ryder TECHNICAL FEATURES



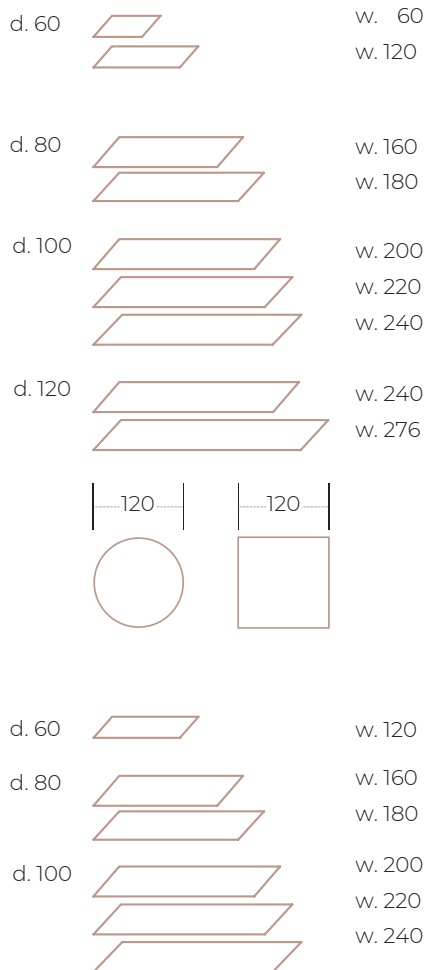


• Veneer tops:

made from 38 mm-thick chipboard panels (density 620 kg/m³, class E1 with a low emission of formaldehyde according to ISO Standards, class of reaction to fire 2) covered on both sides with a 0.6 mm-thick wood veneer panel and 1 mm-thick rounded solid wood edge around the entire perimeter with a radius of 2 mm. The painting is made with colored water and final transparent coat or lacquered open pore finish. The tops are also available in the double version with leather insert or, optionally, in 1.4 cm eco-leather, thick, applied to the tops for their entire length and 60 cm deep. On the worktops there is the possibility of applying a sliding desk pad on nylon guides in both leather and eco-leather with access to an electrified and cable containment tub and with a stationery holder that can slide inside. The meeting tables are made up of tiles with central panels covered in leather or eco-leather.



• Glass tops:

made from 12 mm-thick toughened glass with a shiny rounded edge. The glass tops are fixed to the structure using suction cups.

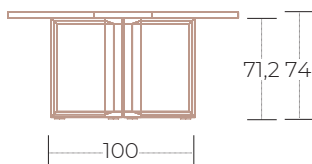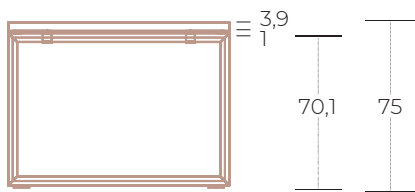


• Structure:

legs are made out veneer solid wood and painted such as worktops ; 12 cm-wide, 4 cm-thick in the inner part and externally reduced to a thickness of 1.8 cm. They are fitted with abs levelling feet. The legs can be joined by a pair of beams made from 40x40 mm square-section cold-drawn tube, secured to the plates with metric-pitch screws, all painted with black epoxy powder. The veneer tops are attached to the legs by means of 6MA screws connected to the metal bushes inserted under the top. The beams of the hanging return can attach to those of the desk by means of a special metal joint system. By means of stressed nylon articulated elements, the beams also allow trays, tilting baskets and modular elements to be mounted, made out of chrome-plated 6 mm-section wire, with 3.5 mm inner mesh; these are necessary for the threading and holding of electrical, telephone and data cables.

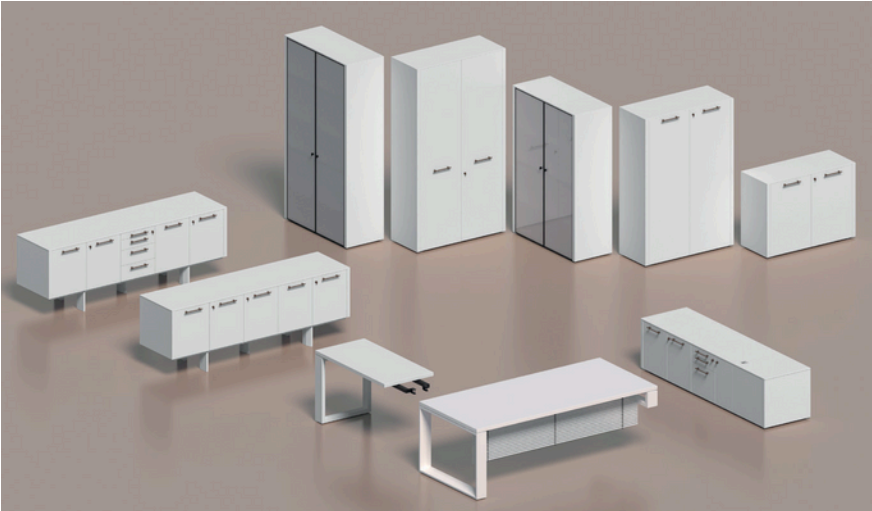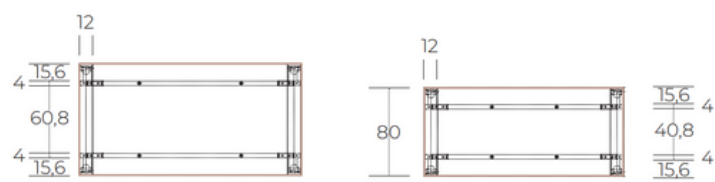


• Desks abacus

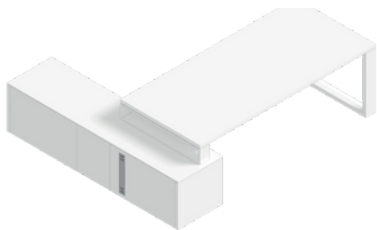

• **Bridge desk on service cabinet:**

desk that lays on a service unit. They can be mounted both on the right and on the left. Containers with different dimensions with no pre-holes on the top. The user can choose position of the desk to his liking.

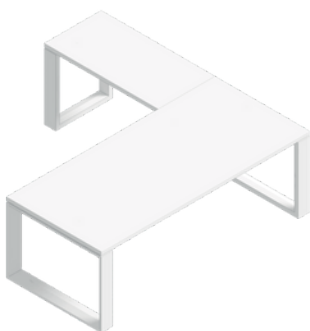

• **Desk with hanging return:**


60 cm deep add-on module fixed to the 80 cm deep main desk by means of a molded joint in fiberglass filled ABS, which allows beam-to-beam connection.

N. 2 steel plates with fixing through N. 4 self-tapping screws and 4 metric for the perfect alignment of the tops and N. 1 clip that hooked to the beam gives the possibility with N 1 self-tapping screw to fix the surface of the hanging return desk.



• Modesty panels:

made of a veneered chipboard panel of 19mm-thick painted such as worktops or thin wooden plates, 30 mm-wide and 3 mm-thick. The modesty panels are fixed to the beams by laser cut metal clamps.

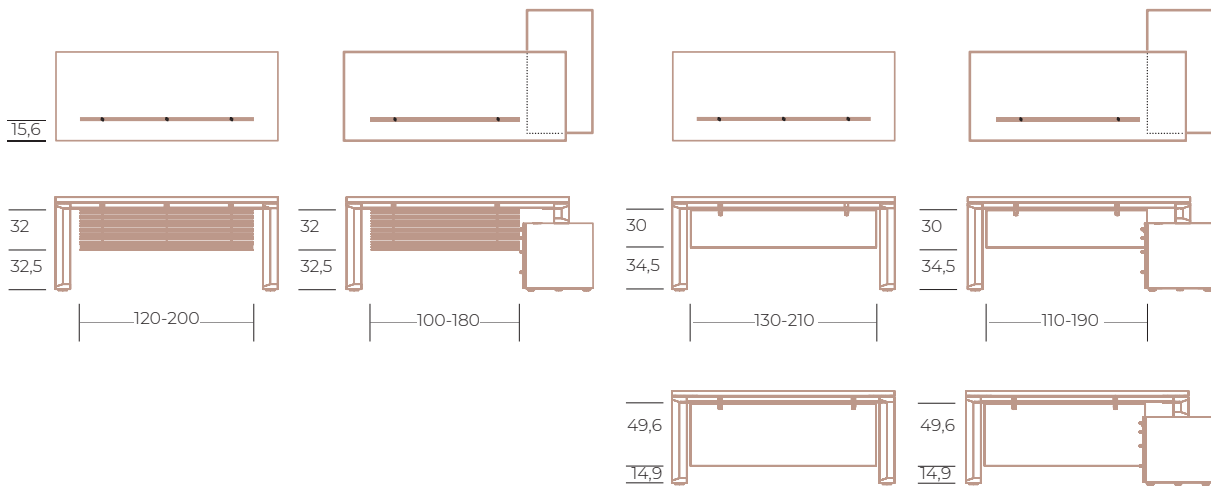


• Desk pad



• Slide-out centre desk pad in leather applied to the worktop


On the worktops there is the possibility of applying a sliding desk pad on nylon guides in both leather and eco-leather with access to an electrified and cable containment tub and with a stationery holder that can slide inside.

Ryder DESK ELECTRIFICATION

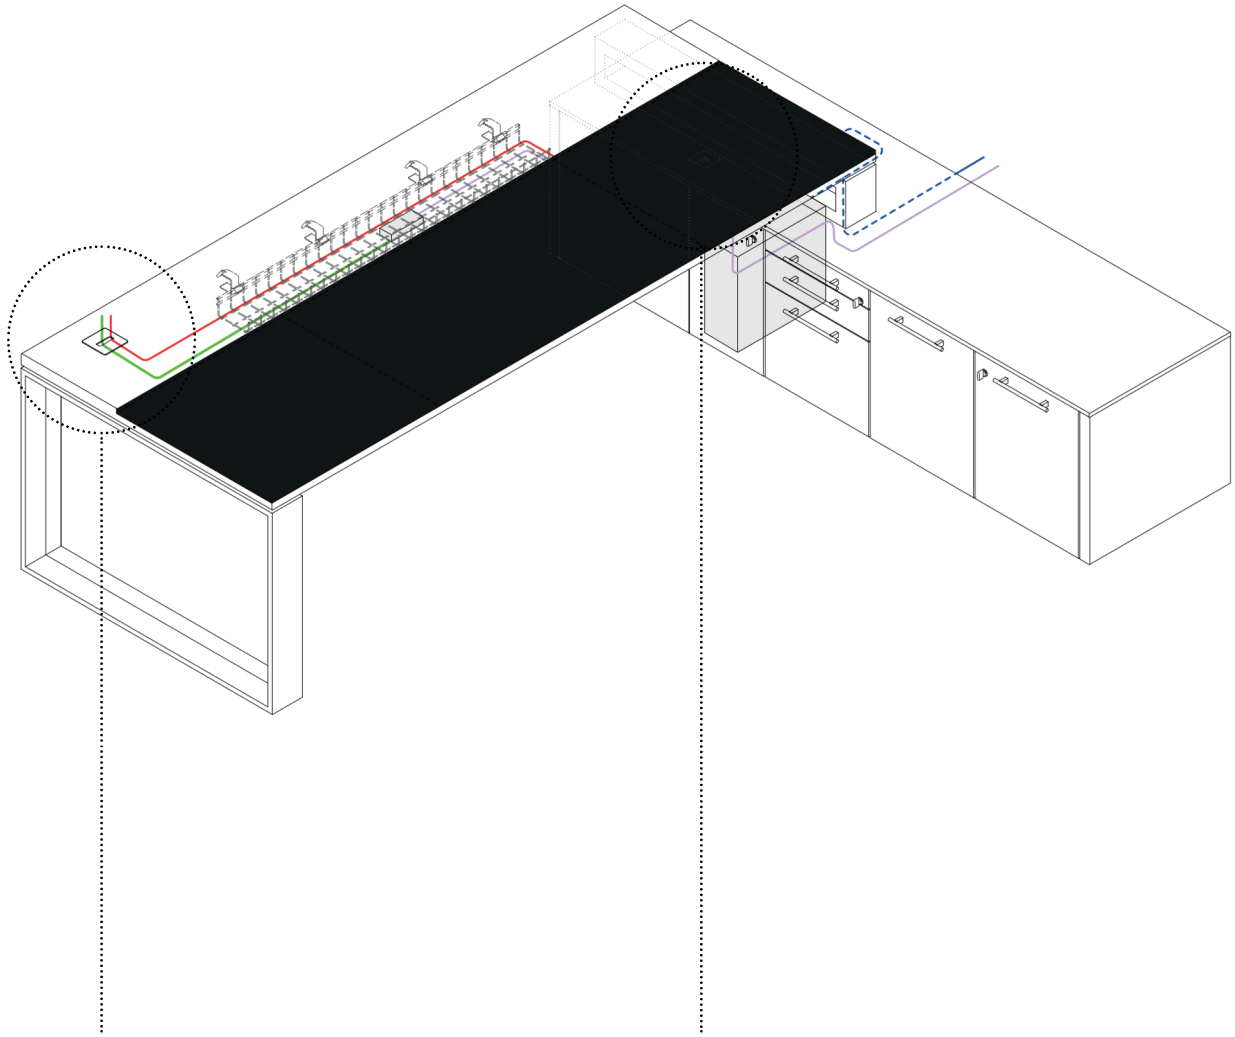


Service side units • SYNOPTIC GRID

H: 60,6 cm




w 133,3 cm
d 56,2 cm

H: 74 cm





w 175,2 cm
d 56,2 cm


H: 54 cm

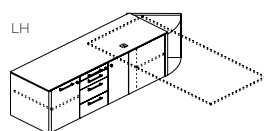

w 173,2 cm
d 56,2 cm

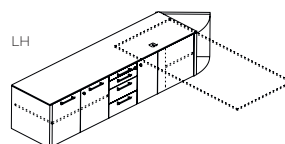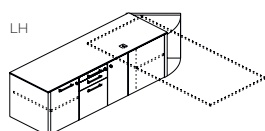

w 214,9 cm
d 56,2 cm

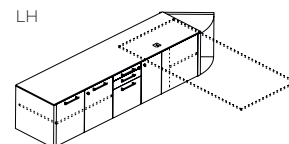






Service module • TECHNICAL FEATURES



structure made of 18 mm thick chipboard edged on 4 sides with melamine paper (weight 620 Kg per m³, class E1 with low formaldehyde emission, class 2 fire reaction according to ISO standards), equipped with Ø52 x h.18 mm feet with adjustable foot inside the furniture. All coatings are of wood, the doors can also be lacquered, with 0.6 mm thick veneer on both sides. Fronts, doors 1,9cm thick, backs and tops 1,3cm thick, side panels 3,9cm thick are edged along the perimeter in 1 mm thick solid wood with 2 mm radius. The doors are fitted with anticorrosion treated hinges with an opening of 105° and soft slow closure, the locks are a cylindrical Yale type with burnished knob. The back finishing has the ventilation of the CPU holder. The handles are metal with burnished finish. The drawers, applied with galvanized metal guides, telescopic extraction and integrated soft closure, have are made of folded sheet metal with an 8/10 thickness and painted with epoxy powders. A stationary drawer is always supplied (apart from furniture without a lock), equipped with total sliding extraction guides on on ball guides with integrated soft. Appropriate drilling along the side edges allows the installation of optional accessories, such as horizontal separators. The furniture are positioned on 6 cm diameter swivel wheels, 2 of which with a brake; the filing cabinets have the 5th wheel with a function to prevent overturning. 33 and 39 cm files can be hung from the file hanger frame.

Pedestals and service side units • CONSTRUCTION FEATURES

• Internal measures

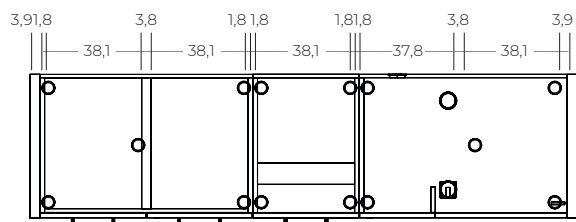


Pedestals and service side units • ACCESSORIES



- horizontal separator for metal drawer

Credenza • SYNOPTIC GRID

H: 74 cm

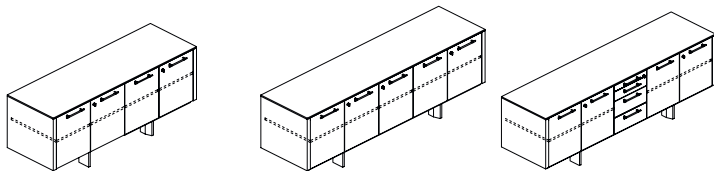

w 175,2 cm
d 56,2 cm


w 216,9 cm
d 56,2 cm

Credenza • TECHNICAL FEATURES

• Credenza:

structure made of 18 mm thick chipboard edged on 4 sides with melamine paper (weight 620 Kg per m³, class E1 with low formaldehyde emission, class 2 fire reaction according to ISO standards), equipped with Ø52 x h.18 mm feet with adjustable foot inside the furniture. All coatings are of wood, the doors can also be lacquered, with 0.6 mm thick veneer on both sides. Fronts, doors 1,9cm thick, backs and tops 1,3cm thick, side panels 3,9cm thick are edged along the perimeter in 1 mm thick solid wood with 2 mm radius. The doors are fitted with anticorrosion treated hinges with an opening of 105° and soft slow closure, the locks are a cylindrical Yale type with burnished knob. The back finishing has the ventilation of the CPU holder. The handles are metal with burnished finish. The drawers, applied with galvanized metal guides, telescopic extraction and integrated soft closure, have are made of folded sheet metal with an 8/10 thickness and painted with epoxy powders. A stationary drawer is always supplied (apart from furniture without a lock), equipped with total sliding extraction guides on on ball guides with integrated soft. Appropriate drilling along the side edges allows the installation of optional accessories, such as horizontal separators. The furniture are positioned on 6 cm diameter swivel wheels, 2 of which with a brake; the filing cabinets have the 5th wheel with a function to prevent overturning. 33 and 39 cm files can be hung from the file hanger frame.


Credenza • CONSTRUCTION FEATURES

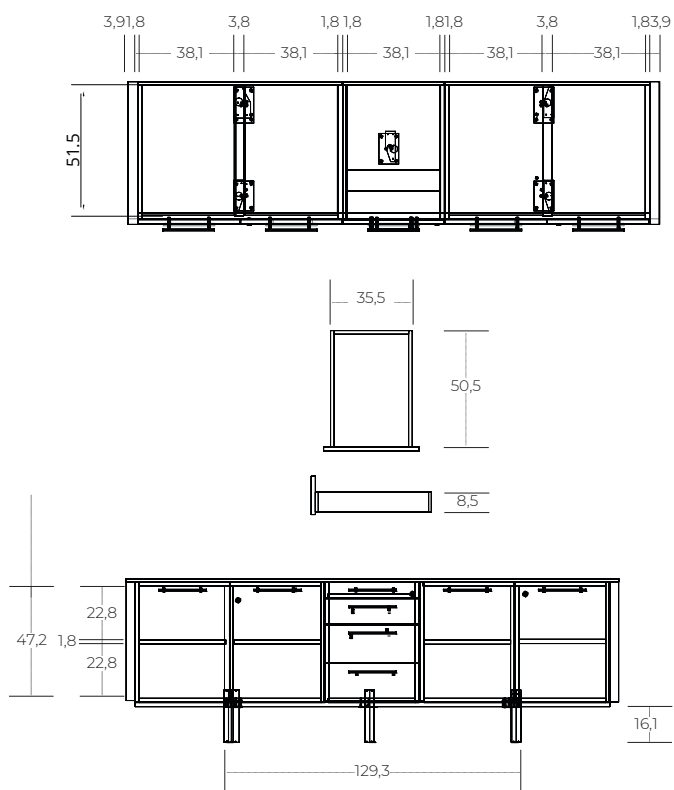


d. 46

W: 50 cm


h. 78,6








h. 155,4



h. 193,8



W: 100 cm

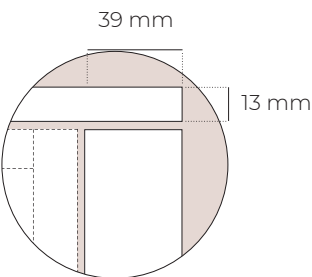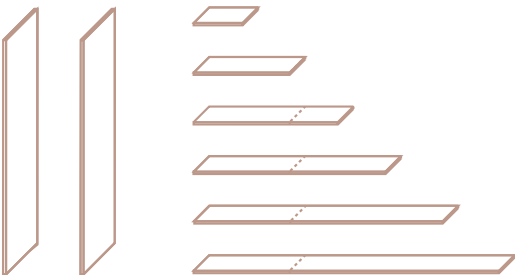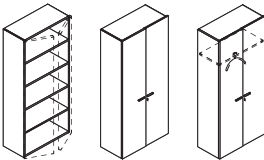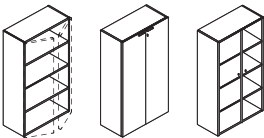

• **Pair of fastening sides**

Wood

*with top: Side fastener is compulsory

w	h	d
3,9 cm	76,8/153,6/192 cm	46 cm

• **Top**
Wood

w	h	d
58÷308cm	1,3 cm	46 cm

• Cabinets:

these are provided in 3 heights, 2 widths and 1 depth and externally finished with a modular top, wood thickness 13 mm, and a pair of side panels, with modular height, wood thickness 39 mm. The top overlaps on the side finish.

• Structure:


made from chipboard (weighing 620 Kg per cubic metre, class E1 classified with a low emission of formaldehyde, class 2 classified for reaction to fire according to ISO standards). It is faced with 18mm thick decorative paper with a black finish impregnated with melamine resins for sides, top and bottom; 12mm thick for the back and 25mm thick for fixed and adjustable interior shelves. The sides have double holes at intervals of 32mm that are suitable to accommodate interior fittings and the hinges of the doors. While levelling feet in black ABS having a diameter of 5 cm and a height of 1.8 cm are applied to the bottom panel. Quick assembly of the structure is possible by using special metal corrosion-resistant hardware. Suitable holes on the sides allow the use of telescopic fixing screws used to join the structures together.

• Veneer doors:

made of thick chipboard. mm. 18 coated on both sides with a veneer having 0.6 mm. thick and painted, such as desk tops. Along the outer sides have rounded edges in solid wood and varnished mm thick. 1 mm. radius. 2.

• Glass doors:

with perimeter frame made of extruded polished aluminum and thick tempered glass. 4 mm. The glass of the "frosted" have the outer surface in satin finish and varnished inner surface finishes such as color chart, the opening of the doors is through the power chromed knobs, on these doors you cannot mount the lock.

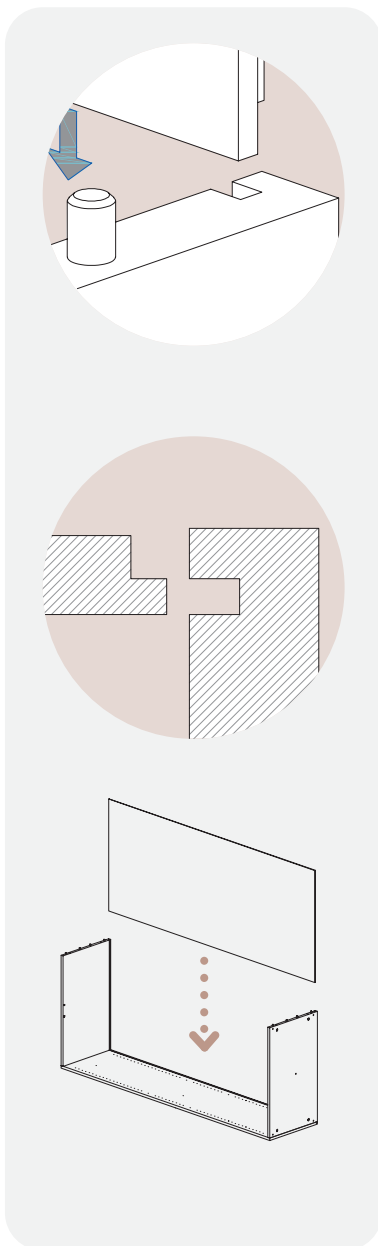

structural back panel 12 mm



rotating rod lock H. 200 W. 100



lock with removable cam



knob




door with duster




25 mm

shelf with support

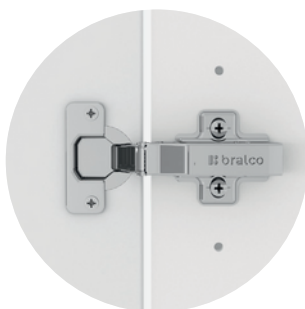

110° slow-motion hinge for wooden doors

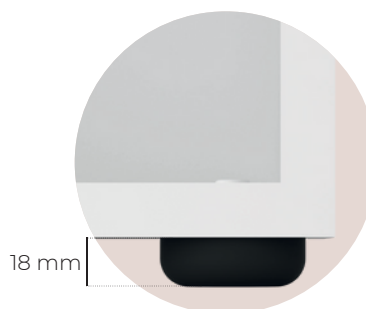


18 mm

levelling foot

Storage units • CONSTRUCTION FEATURES

d: 46 cm

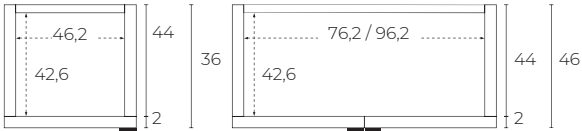

• Possibility to file documents




• Melamine shelf
deforming evenly distributed
under load

• Metal shelf
deforming evenly distributed
under load


• Side

w: 50 cm	49 Kg	1,5 mm
w: 100 cm	98 Kg	3 mm

w: 50 cm	49 Kg	0,7 mm
w: 100 cm	98 Kg	1,3 mm

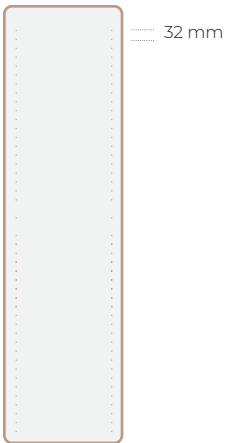


Worktops




• Veneer




Legs



• Veneer

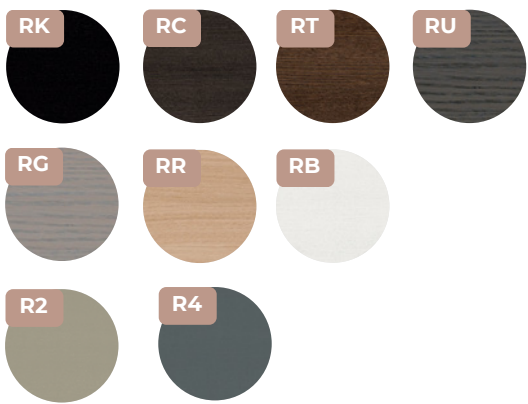


Modesty panel





• Veneer



• Lacado mate

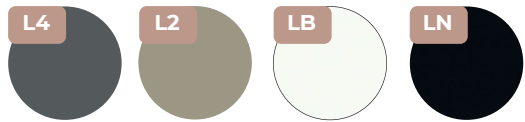

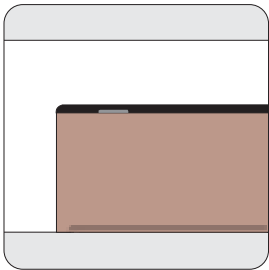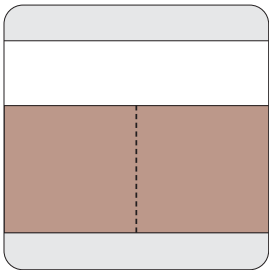

Pedestals and service side units • FINISHES



2 • Melamine (shell only)



1 3 4 • Veneer



3 • Lacquered matt



5 Handle



5 • Metal



Credenza • FINISHES



- 1 TOP
- 2 SIDES, BACK
- 3 BASE, FRAME
- 4 DOORS
- 5 HANDLES
- 6 LEGS

1 Top-side veneer



1 2 4 6 • Veneer



6 • Veneer



3 • Melamine



4 • Lacquered matt



5 Handles



5 • Metal



Storage units • FINISHES



- 1 STRUCTURE
- 2 SHELVES
- 3 TOP AND SIDES
- 4 DOORS
- 4.1 GLASS DOOR WITH FRAME
- 5 HANDLES


1 2 • Melamine



3 4 • Veneer



4 • Lacquered matt

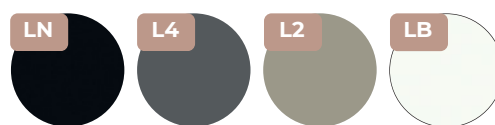


5 Handle



5 • Metal



4.1 GLASS DOOR WITH FRAME

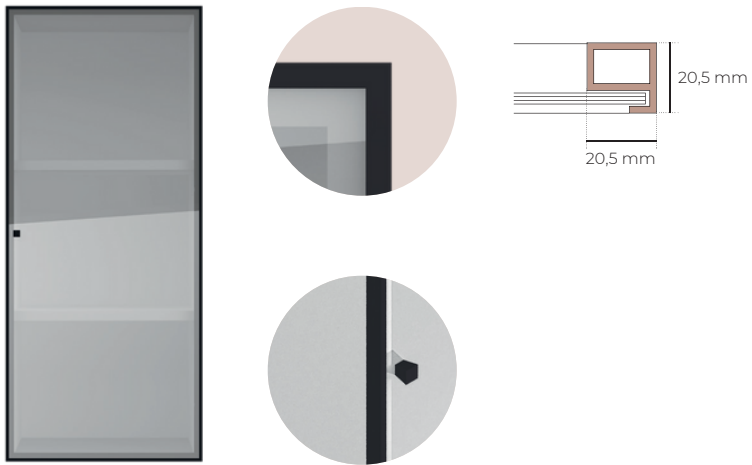

• Metal (frame)



• Glass



aura design



Hub Spaces, 582 Honeypot Lane, Stanmore, HA7 1JS, UK
www.auraadesign.co.uk
020 3915 8008
info@auraadesign.co.uk